

CATALOG SOLUTIONS FOR CHROMATOGRAPHY









Fax.: +86-571-88990159*888 Tel.: +86-571-88837380 Mail: sales@alwsci.com Web: www.alwsci.com

Office Add.:

B410, No.525 Shixiang Rd, Gongshu District, Hangzhou 310011, Zhejiang P.R., China.

Connect with us:







Factory Add.:

Yuexing Technology Innovation Park, No. 11 Fanrong Road, Binhai New City, Shaoxing 312366, Zhejiang P.R., China

Exclusive Distributor in Thailand: EOS Scientific Co., Ltd. (Head office)

Tel.: (66) 2613-7911-4, 2613-7600-5 Fax:(66) 2613-7915 E-mail:siriyong.s@eosscientific.com www.eosscientific.com

Add: 24 Rama 1 Road, Rongmuang, Pathumwan, Bangkok 10330, Thailand









All copyrights reserved by ALWSCI, the 1st printing version 4 in 2019.



ABOUT US

ALWSCI Group

As a global supplier of Chromatography Vials, Closures, Septa and Syringe Filters, ALWSCI devote analytical test and laboratory consumables to provide high quality, efficient service and favorable price.

As an ISO 9001:2015 certified company, ALWSCI have set up high quality standards for ourselves and took fully responsible for all clients.

Besides, ALWSCI own 10,000 SQM factory area with 5,000 SQM 100,000 grade cleaning room. To keep stable quality, improve productivity, and avoid any contamination from human interference, ALWSCI have invested more than 10 automatic production lines presently.

To offer a better solution of sample preparation, full production line is available, including a series of sample vials from 1ML to 1,000ML, Septa from 4mm to 55mm diameter, and Syringe filters made of various membrane.

We would like to draw your attention to Ultra-Clean Septa and EPA Quality Vial KIT. These high quality consumables are mostly used for LC/MS, GC/MS and MS/MS in the environmental, chemical, food and pharmaceutical industries.

We have customers from pharmaceutical, life science, chemistry, technology, food processing industry and so on. Others like University, research institution, government institution, environment test institution, etc.

ALWSCI Group has two famous brands, ALWSCI and Labfil.

- ALWSCI focus on Chromatography Vial, Closures and Sample Storage Vial.
- Labfil focus on Filtration, including Membrane, and Syringe Filters (sterile and non-sterile).



labfil

Main products:

Analysis: Autosampler Vials & Closures. Storage: Sample Vials & Closures.

Main products:

Filtration: Membrane, Syringe Filters, and etc.

Further products are available upon request!

Hopefully you will find the introduction of our company not only informative, but also interesting.

- We would like to thank you for taking the time to visit our website.
- www.alwsci.com
- www.labfil.com

Zhejiang ALWSCI Technologies Co., Ltd.















PRODUCT CONTENTS

| ALWSCI® | ## Hot Products ## UltraVial ———— 03-04 ## EPA/TOC Vials & Closures ———— 05 ## Bonded ————— 06 | - 02 |
|---------|--|-------------|
| | | A-1-1-1 |
| ALWSCI® | Autosampler Vials & Closures Screw Neck ND8 — 08 5mm Micro Insert — 08 Short Thread ND9 — 09-10 6mm Micro Insert — 10 Crimp Neck ND11 — 11 Snap Neck ND11 — 12 Short Thread ND13 — 13 Shell Vial — 14 Test Tube — 14 High Recovery Vial — 14 Screw Neck ND10 — 14 | - 07 |
| | Headspace Vials & Closures — | - 15 |
| ALWSCI® | Screw Headspace ND18 — 16 Crimp Headspace ND20 — 17-18 20mm Butyl Septa — 18 Customized Service — 19 | - 15 |
| | C | |
| ALWSCI® | Sample Vials & Closures Sample Vials & Closures — 21-22 24-400 Closures With Sample Vial — 23 Sample Vial Kit Package — 24 Narrow Mouth Bottle — 25-26 Wide Mouth Bottle — 27-28 | – 20 |
| | Tools — | 00 |
| ALWSCI® | Tools ✓ Vial Rack ———————————————————————————————————— | —29 |

| Labfil [®] | Welded Syringe Filter ✓ Nylon — 35 ✓ PES — 36 ✓ PTFE — 37-38 ✓ PVDF — 39-40 ✓ CA — 41 ✓ RC — 42 | — 32 |
|---------------------|--|-------------------|
| | 110 42 | |
| Labfil [®] | Economy Syringe Filter → Nylon ———————————————————————————————————— | — 43 |
| | | |
| Labfil [®] | Sterile Syringe Filter | — 52 |
| | | |
| Labfil [®] | Membrane Filter | — 55 57 |



Zhejiang ALWSCI Technologies Co.,Ltd. www.alwsci.com

ALWSCI Main products:

Analysis: Autosampler Vials & Closures.

Storage: Sample Vials & Closures.

Selection Guide

- · Proper septa selection is critical to prevent contamination and avoid damage to the needle and instrument.
- . The right choice of septa depends on the application.
- · For highly sensitive samples, we recommend PTFE-lined Silicone septa, because the PTFE layer is good at
- Besides, septa made of different materials are with different safety temperature resistance.

▶ Septa Selection Guide

| Materials | Safety Temperature |
|-------------------------------|--------------------|
| PTFE/Silicone | 180°C |
| PTFE/Silicone/PTFE | 200°C |
| Red Rubber/PTFE | -40°C to 110°C |
| Natural Rubber/TEF Butyl/PTFE | -40°C to 120°C |
| PE | -20°C to 80°C |

▶ Cap Selection Guide

| Materials | Safety Temperature |
|--------------|--------------------|
| PP Cap | -20°C to 100°C |
| Aluminum Cap | −60°C to 300°C |

Better Your Chromatography Consumables.





Hot Products

UltraVial

- · Resealable box helps to prevent contamination during use.
- . Constructed with PTFE/ Silicone septa for contamination free sampling.
- · Ultra Clean PTFE/ Silicone septa is optimized for gas chromatography and mass spectrometry.

> UltraVial - 2mL Vials & Closures





Ref.No. C0001170

2mL Clear Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label. Blue 9-425 Open Top Ribbed Screw Cap Description with 9mm Red PTFE/White Silicone Septa 1mm Thick

(UltraClean).

C0001172

2mL Amber Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label. Blue 9-425 Open Top Ribbed Screw Cap with 9mm Red PTFE/White Silicone Septa 1mm Thick (UltraClean)

Vial Cap Septa are pre-assembled together. Blue Kit Packing.100sets/pk













Ref.No. C0001017

Description

8-425 Open Top Screw Cap with 8mm Red PTFE/White Silicone Septa 1.5mm Thick (UltraClean).

11mm Open Top Snap Cap with Red PTFE/White Silicone Septa 1mm Thick (UltraClean).

C0001018 C0001019

9-425 Open Top Ribbed Screw Cap with 9mm Red PTFE/White Silicone Septa 1mm Thick (UltraClean).













Ref.No. C0001020

Description

9-425 Open Top Ribbed Screw Cap with 9mm Red PTFE/White Silicone Septa 1mm Thick PRE-SLIT (UltraClean).

C0001021

9-425 Open Top Smooth Screw Cap with 9mm Red PTFE/White Silicone 1mm Thick (UltraClean).

C0001028

9-425 Open Top Ribbed Screw Cap with 9mm White PTFE/Red Silicone Septa 1mm Thick (UltraClean).

100pcs/pk









Ref.No. C0001037

Description

8-425 Open Top Screw Cap with 8mm Blue PTFE/White Silicone Septa 1.5mm Thick (UltraClean).

9-425 Open Top Ribbed Screw Cap with 9mm Blue PTFE/White Silicone Septa 1mm Thick PRE-SLIT (UltraClean).



> UltraVial - ND18





Ref.No. C0000974

Silver Color Open Top Metal Cap (8mm hole) Description with 17.5mm White PTFE/Blue Transparent Silicone Septa

1.5mm Thick (UltraClean).

C0000975

Silver Color Open Top Metal Cap (8mm hole) with 17.5mm Natural PTFE/Blue Transparent Silicone Septa

1.5mm Thick (UltraClean).

100pcs/pk.

> UltraVial - ND20









Ref.No. C0000927

Open Top Aluminum Crimp Cap (10mm hole) Description with 20mm

White PTFE/Blue Silicone Septa 3mm Thick (UltraClean).

Open Top Aluminum Crimp Cap (10mm hole) White PTFE/Blue Transparent Silicone Septa

3mm Thick (UltraClean).

C0000972

C0000973

Open Top Aluminum Crimp Cap (10mm hole)

Natural PTFE/Blue Transparent Silicone Septa

3mm Thick (UltraClean).

> UltraVial - ND24







C0001189



| Ref.No. | C0000316 |
|---------|----------|
| | |

Description

Blue PTFE/White Silicone 3.0mm thick Septa (Ultra Clean).

C0001082

Natural PTFE/White Silicone 3.0mm thick Septa (Ultra Clean).

24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/ White Silicone 3.0mm Thick Septa (EPA Quality).

Mail: sales@alwsci.com www.alwsci.com

Hot Products

EPA/TOC Vials & Closures

- · If you are doing any sampling, testing, or validation, you need to make sure the results were not skewed by a contaminant that may have come from the container.
- ALWSCI offers a range of certified EPA Screw Vial Convenience Kits which are suitable on all TOC manufacturer's instruments, including Sievers, Shimadzu, Ol Analytical, and Teledyne-Tekmar.
- · All Certified to contain <10ppb Carbon, giving you confidence in the quality of your TOC measurements.
- · Teflon lined caps and protective dust covers.
- · Superior vial-to-vial consistency.
- · Capped with teflon lined silicone septa and dust cover.
- · Widely apply to air, water, soil analysis test, also pesticide residue, pharmaceutical manufacturing and forensic test.

> UltraVial - EPA/TOC





C0000413

Ref.No.

20mL 27.5x57mm Clear Glass EPA /TOC Vial 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality)



C0000331

20mL 27.5x57mm Amber Glass EPA/TOC Vial 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality).



C0000338/C0000339

20mL 27.5x57mm Clear/Amber Glass EPA/TOC Vial 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality) and Dust Cover.





40mL 27.5x95mm

Clear Glass EPA/TOC Vial

3.0mm thick Septa (EPA Quality).

Ref.No. C0000334

Description



C0000335

Amber Glass EPA/TOC Vial 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality).





40mL 27.5x95mm 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone



C0000342/C0000343

40mL 27.5x95mm Clear/Amber Glass EPA/TOC Vial 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality) and Dust Cover.









Blue Kit Packing

Ref.No. C0000336

60mL 27.5x140mm Clear Glass EPA/TOC Vial 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality).

C0000337 60mL 27.5x140mm

Amber Glass EPA VOA VOC TOC Vial 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality).

pre-assembled together. 100pcs/pk.

Bonded

- · Our bonding machines are fully automated to bond liners to caps using a mechanical bond without any adhesives or chemicals.
- · No glue contamination.
- · No additional assembly.
- · Prevent liner fallout.
- · Use with different polypropylene caps.
- Available in 1mm-3mm standard thicknesses; customization is available.
- · Ideal for medical devices, diagnostics packaging and specialty chemicals

>ND9 Closures









9-425 Open Top Ribbed Screw Cap Bonde

with 9mm Red PTFE/White Silicone

Septa 1mm Thick PRE-SLIT.



Ref.No.

Description

9-425 Open Top Ribbed Screw Cap Bonded with 9mm Red PTFE/White Silicone Septa 1mm Thick

C0001359

>ND 24 Closures





24-400 White Open Top PP Screw Cap Bonded with 22mm Natural PTFE/White Silicone Description Septa 3mm Thick.

100pcs/pk



Mail: sales@alwsci.com www.alwsci.com



ALWSCI® **AUTOSAMPLER VIALS & CLOSURES**

Screw Neck ND8

- · Standard opening vials for GC and HPLC, used on instruments of Shimadzu, Varian, Gilson etc.
- · To meet your micro sampling needs, ALWSCI has avariety of micro volume inserts with capacities and designs that can transform our vials from full-capacity to limited volume with one simple step.
- · Standard opening requires Micro-insert with a diameter of 5mm.
- · Micro inserts with flat bottom, conical base, with plastic spring are available.
- · The conical design permits complete sample removal.









Ref.No.

2mL Clear Glass 12x32mm Flat Base Description 8-425 Screw Thread Vial.

2mL Clear Glass 12x32mm Flat Base 8-425 Screw Thread Vial

2mL Amber Glass 12x32mm Flat Base 8-425 Screw Thread Vial.

2mL Amber Glass 12x32mm Flat Base 8-425 Screw Thread Vial

100pcs/pk

> 8mm Septa



> ND 8 Closures







Description

5x29mm Insert Clear Glass Conical Base with Polyspring. 5x31mm Insert Clear Glass Conical Base.

5x31mm Insert Clear Glass Flat Base.

100pcs/pk

- · Wide opening 9-425 vials can be used on all common autosamplers, perfectly compatible with Agilent, Thermo Scientific, Waters, Varian, etc.
- · Vials with intergrated micro-insert are available in clear and amber glass.
- · Wide opening 12x32mm, 2ml Polypropylene vials have chemically resistance, which are used for atomic absorption, water and protein analysis, capillary electrophoresis, ion chromatography applications etc.
- PTFE/silicone slit shape choices are Single, Y-shape, Cross available.
- . The polymer spring acts as a shock absorber that protects against breakage if the needle bottoms out.
- · Vials and closures are available for packing into a kit to reduce the risk of contamination of vials in
- · A variety of septa colors and pre-assmbled closures are available to offer as request.



Short Neck ND9



2mL Clear Glass 12x32mm Flat Base Description 9-425 Screw Thread Vial.



C0000008

2mL Clear Glass 12x32mm Flat Base 9-425 Screw Thread Vial



C0000010

2mL Amber Glass 12x32mm Flat Base 9-425 Screw Thread Vial.



C0000011

2mL Amber Glass 12x32mm Flat Base 9-425 Screw Thread Vial





PP Screw Thread Micro-Vial

Transparent, 12x32mm,

0.3mL 9-425

Ref.No. C0000084

Description

Ref.No.



C0000410 2mL 9-425

Wide Opening PP Screw Vial with Graduations Transparent



2mL 9-425 12x32mm

C0000127

Clear Screw Thread Vial Bottom with Integrated 0.2ml Glass Micro-insert.

100pcs/pk



Ref.No.

Description

2mL Amber Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label. Blue 9-425 Open Top Ribbed Screw Cap with 9mm White PTFE/Red Silicone Septa 1mm Thick.



C0000962

2mL Clear Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label. Blue 9-425 Open Top Ribbed Screw Cap with 9mm White PTFE/Red Silicone Septa 1mm Thick.

Kit Packing.100pcs/pk

> 9mm Septa





C0000329





C0000324



C0000431

C0000402 Ref.No. Description

Ref.No.

9.425 Red PTFE/White Silicone

Septa 1.0mm Thick Pre-slit(Mercedes Shape).

9.425 White PTFE/Red Silicone Blue PTFE/White Silicone Septa 1mm Thick.

Red PTFE/White Silicone Blue PTFE/White Silicone Septa 1mm Thick Pre-slit.

C0000439



Red PTFE/White Silicone

C0001133



C0000801

Red PTFE/White Silicone Septa 1mm Thick Pre-slit(Cross Shape). 100pcs/pk

C0000460

Natural PTFE/White Silicone Septa 1mm thick.

> ND9 Cap











C0001051





Ref.No.

Blue 9-425 Open Top Smooth Screw Cap.

C0000421

C0000327 Blue 9-425 Open Top Ribbed Screw Cap.

Black 9-425 Open Top

C0000148

Black 9-425 Open Top Smooth Screw Cap. Ribbed Screw Cap. 100pcs/pk

C0000856 Gold Magnetic 9-425

Open Top Screw Cap.

>ND9 Closures











C0001132











Ref.No. C0000143

Blue 9-425 Open Top Ribbed Screw Cap with 9mm Red PTFE/White Silicone Septa 1mm Thick.

Blue 9-425 Open Top Ribbed Screw Cap with 9mm Red PTFE/White Silicone Septa 1mm Thick Pre-slit.

100pcs/pk

C0000149

Blue 9-425 Open Top Ribbed Screw Cap with 9mm Blue PTFE/White Silicone Septa 1mm Thick Pre-slit.

> 6mm Micro Insert





Ref.No. C0000070

6x29mm Insert Clear Glass Description Conical Base with Polyspring.



Conical Base.

100pcs/pk

6x31mm Insert Clear Glass



C0000077 6x31mm Insert Clear Glass

6x29mm PP Insert Conical Base.

Flat Base.

Crimp Neck ND11

- . The Crimp Vials are used on instruments of Agilent, PerkinElmer, Varian, etc.
- . The wide opening crimp cap provides a larger target area for improved autosampler needle accuracy.
- Vials with intergrated Micro-insert are also available in clear and amber glass.
- · PTFE/silicone, Natural Rubber/TEF septa, single slit septa to choose.
- . The 3-layer septa of Natural Rubber/Red Butyl/TEF combines the good physical properties of Nat. Rubber (Resealability) with good chemical properties of butyl. (See Customized service page)











Ref.No. C0000014 Description 11mm Crimp Vial Wide Opening.

Clear Glass Flat Base

Clear Glass Flat Base 11mm Crimp Vial Wide Opening with Label.

Amber Glass Flat Base 11mm Crimp Vial 100pcs/pk

Amber Glass Flat Base 11mm Crimp Vial Wide Opening with Label.

2mL 11mm Crimp Top Clear Vial Bottom with Integrated 0.2ml Glass Micro-insert.

>ND 11 Closures

C0000164

SILVER 11mm

Open Top Crimp Can

with CLEAR TEF/ Red Silicone

Ref.No.













C0000167

C0000165 SILVER 11mm Open Top Crimp Cap

with Red PTFE/ White Silicone

C0000166 SILVER 11mm Onen Ton Crimp Can with Red PTFE/ White Silicone/Red PTFE

SILVER 11mm Open Top Crimp Cap with Red Silicone Septa 1mm Thick

100pcs/pl











Ref.No. C0000168

Open Top Crimp Cap Description with White PTFF/ Red Silicone Septa1mm Thick.

C0000169 * Patent No.: CN107163311B

Open Top Crimp Cap with Transparent TEF/Natural Rubber red-orange Septa 1mm Thick.

C0000980

SILVER 11mm Open Top Crimp Cap with Red PTFE/ White Silicone Septa 1mm Thick Pre-slit.

100pcs/pk

Snap Neck ND11

- . The vials are used on instruments of Agilent, CTC, Thermo Scientific, Waters, etc.
- · Snap Ring finish eliminates the need for crimping or decapping.
- The intergrated Micro-insert are available for in clear and amber glass, micro-inserts can be delivered preassembled in vials.
- · Snap ring caps are also available in a soft quality with transparent or blue caps, soft caps are more convenient in handling (pushing on/removal).
- · The septa shapes have Single and Snow type to choose.











Ref.No. Description

Clear Glass Flat Base 11mm Snap Vial Wide Opening.

Clear Glass Flat Base 11mm Snap Vial

Amber Glass Flat Base 11mm Snap Vial Wide Opening with Label. Wide Opening.

C0000023

Amber Glass Flat Base 11mm Snap Vial Wide Opening with Label.

Snap Top Clear Vial Bottom with Integrated 0.2ml Glass Micro-insert.

100pcs/pk

>ND 11 Closures









C0000172







Ref.No.

CLEAR 11mm Open Top Snap Cap with Red PTFE/White Silicone Septa 1mm Thick

C0000170

C0000171

BLUE 11mm Open Top Snap Cap Septa 1mm Thick

RED 11mm Open Top Snap Cap with Red PTFE/White Silicone with Red PTFE/White Silicone Septa 1mm Thick

Septa 1mm Thick.



100pcs/pk















Ref.No. C0000174

CLEAR 11mm Open Top Snap Cap with Red PTFE/White Silicone Septa 1mm Thick Pre-slit.

C0000175

CLEAR 11mm Open Top Snap Cap Septa 1mm Thick Pre-slit (snow shape).

C0000176

CLEAR 11mm Open Top Snap Cap with Red PTFE/White Silicone with Transparent TEF/Natural Rubber red-orange with White PTFE/Red Silicone Septa 1mm Thick.

C0000177 CLEAR 11mm

Open Top Snap Cap Septa 1mm Thick.

100pcs/pk

Mail: sales@alwsci.com www.alwsci.com

Short Thread ND13

- . The vials are used on instruments of Dionex, Shimadzu, VWR, Waters etc.
- · 4ML vials are widely used in compound storage as well as for Chromatography vials, available as closed or open top screw seals with 13-425 thread.









Ref.No. C0000024 15x45mm Flat Base Description 13-425 Screw Thread Vial.

15x45mm Flat Base 13-425 Screw Thread Vial with Label

4mL Amber Glass 15x45mm Flat Base 13-425 Screw Thread Vial.

4mL Amber Glass 15x45mm Flat Base 13-425 Screw Thread Vial with Label.

100pcs/pk

>ND 13 Septa











| Ref.No. | C0000322 |
|---------|-------------|
| | Pendatherio |

Description Red PTFE/White Silicone Septa 1mm Thick

C0000408 13mm Red PTFE/White Silicone

White PTFE/Red Silicone Septa 1mm Thick Pre-slit. Septa 1mm Thick.

C0000863 C0000935 Natural PTFE/White Silicone Septa 1mm thick.

C0001134 Pure PTFE Septa 1.0mm Thick.

100pcs/pk

>ND 13 Closures

Ref.No.

Description



Open Top Screw Cap

Septa 1mm Thick

with Red PTFE/White Silicone

C0000179

Black PP

13-425



C0000180

Open Top Screw Cap

Septa 1mm Thick Pre-slit.

with Red PTFE/White Silicone

Black PP

13-425









C0000182

C0000181 Black PP

13-425 Open Top Screw Cap with White PTFE/Red Silicone Septa 1mm Thick.

Black PP 13-425 Open Top Screw Cap with Natural PTFE/White Silicone Septa 1mm Thick.

100pcs/pk

Shell Vial

- . The vial with soft plug is used on Waters and Shimadzu, the star-shaped plug is for easy penetration.
- . The normal size is 8x40mm, and 8x30mm is also available.





C0000080

Ref.No.

Description

1mL 8x40mm Flat Base Clear Glass Shell Vial with Plug.

1mL 8x30mm Flat Base Clear Glass Shell Vial with Plug.

200pcs/pk.

High Recovery Vial

- · High recovery vials combine large sample capacities with near full sample extraction.
- · Excellent for Compound Storage.
- · Smoothly sloped inner conical surface ensures a high level of solid/liquid recovery.





Ref.No.

1.5mL High Recovery Vial Clear Glass Description 12x32mm Flat Base 9-425 Screw Thread.

C0001211

1.5mL High Recovery Vial Amber Glass 12x32mm Flat Base 9-425 Screw Thread.

100pcs/pk

Test Tube

· Screw thread test tubes include PP caps with PTFE/silicone septa, which is made from Borosilicate glass tubing.









Ref.No. Description C0001093

15-415 Black Closed Top PP Cap with Blue PTFE/White Silicone Septa

15-415 White Closed Top PP Cap for Test Tube with 15mm Natural PTFE/White Silicone Septa 1.5mm Thick.

Test Tube Clear Glass 16x100mm Rounded Bottom Capacity to Neck 11mL. Chinesing Tubing.

Screw Neck ND10

- · Wide-opening vials provide an increased target area for easier sample preparation and to reduce the chance of bent or broken needles during sampling.
- · Designed to work in Agilent and other autosamplers.



C0001191

with Label.

2mL Clear Glass

12x32mm Flat Base

10-425 Screw Thread Vial

Ref.No.



C0001192







Open Top Screw Cap

with Label. 100pcs/pk

2mL Amber Glass

12x32mm Flat Base

10-425 Screw Thread Vial

with Red PTFE/White Silicone Septa 1mm Thick.



ALWSCI® HEADSPACE VIALS & CLOSURES



- · Pre-assembling vial+closure service is available upon request.
- The magnetic screw caps can be used for headspace as well as for SPME.
- . Type of Cap: Magnetic Precision screw cap, Closed Precision screw cap.













Ref.No.

Clear Glass Amber Glass Screw Headspace Vial Screw Headspace Vial 22.5x46mm.

20mL Clear Glass Screw Headspace Vial

20mL Amber Glass Screw Headspace Vial 22.5x75mm. 22.5x75mm. 100pcs/pk

Silver Color Open Top Metal Cap.

C0000920

Silver Color Closed Top Metal Cap.



22.5x46mm.



Description

Ref.No.

Silver Color
Open Top Metal Cap (8mm hole)
with 17.5mm Blue PTFE/White Silicone Septa 1.5mm Thick.



Septa 1.5mm Thick.

Silver Color Closed Top Metal Cap with Blue PTFE/White Silicone



C0000438 Red PTFE/White Silicone

Blue PTFE/White Silicone Septa 1.5mm thick. Septa 1.5mm Thick.

(used for 18mm magnetic screw cap).

>ND 18 Pre-assembled









Ref.No. C0000977

10mL Clear Glass Screw Headspace Vial 22.5x46mm

18mm Silver Color Open Top Metal Cap (8mm hole)
with 17.5mm Blue PTFE/White Silicone Septa 1.5mm Thick Vial Cap Septa are pre-assembled together

C0000976

20mL Clear Glass Screw Headspace Vial 22.5x75mm

18mm Silver Color Open Top Metal Cap (8mm hole) with 17.5mm Blue PTFE/White Silicone Septa 1.5mm Thick Vial Cap Septa are pre-assembled together.

Mail: sales@alwsci.com www.alwsci.com

Crimp Headspace ND20

- · GC Headspace technology for the analysis of volatile organic solids and liquid samples after gasification
- . The headspace volume have 6ml, 10ml, 20ml clear/amber to choose, the bottom have flat, rounded and
- . Type of Cap:
- · Aluminum Cap, Bimetal cap, Magnetic crimp cap.
- . Type of Liner:
- . Butyl, Butyl/PTFE, Pharma-fix liner, PTFE/silicone, Butyl stopper.











Ref.No. C0000032 Clear Glass Description 22x38mm. 20mm Beveled Edge. Flat Bottom.

Short Neck Crimp Headspace Vial.

10mL Clear Glass 22.5x46mm. 20mm Beveled Edge. Flat Bottom. Crimp Headspace Vial.

Clear Glass 22.5x46mm. 20mm Beveled Edge. Rounded-flat Bottom Crimp Headspace Vial.

Amber Glass 22.5x46mm. 20mm Beveled Edge. Flat Bottom. Crimp Headspace Vial.

Clear Glass 22.5x75mm. 20mm Beveled Edge. Flat Bottom. Crimp Headspace Vial.

100pcs/pk







| Ref.No. | C0000038 |
|-------------|--|
| Description | 20mL Clear Glass 22.5x75mm. 20mm Beveled Edge. Rounded-Flat Bottom. Crimp Headspace Vial. |
| | |

| C0000039 | |
|---|--|
| 20mL Clear Glass 22.5x75mm. 20mm Beveled Edge. Rounded-Flat Bottom. Crimp Headspace Viai. Short Neck. | |
| 100nce/nk | |

| | | l |
|---|--------|---|
| | | ı |
| | | ı |
| | | Į |
| A | 000000 | |

| C0000040 |
|---|
| 20mL Amber Glass 22.5x75mm. 20mm Beveled Edge. Rounded-Flat Bottom. Crimp Headspace Via Short Neck. |
| |

>ND 20 Closures







| Ref.No. | C0000196 | |
|-------------|---|--|
| Description | 20mm Open Top Aluminum Crimp Cap (10mm hole) with 20mm Natural PTFE/White Silicon Senta 3mm Thick | |

| C0000197 | |
|--|--|
| 20mm Open Top Aluminum Crimp Cap (10mm hole) with 20mm Natural PTFE/Blue Silicone Septa 3mm Thick. | |

| C0000198 |
|---|
| 20mm Open Top Aluminum Crimp Cap (10mm hole) with 20mm White PTFE/White Silicone Septa 3mm Thick. |
| |



Aluminum Crimp Cap (10mm hole) with 20mm White PTFE/Blue Silicone



Open Top Aluminum Crimp Cap (10mm hole) with 20mm Red PTFE/White Silicone Septa 3mm Thick.



C0000201

Open Top Aluminum Crimp Cap (10mm hole) with 20mm Natural PTFE/Natural Silicone Septa 3mm Thick.









C0000206

Ref.No. C0000204

Open Top

Septa 3mm Thick.

Ref.No.

Description

Description Gold Magnetic Crimp Cap (10mm hole) with 20mm Natural PTFE/Blue Silicone

Septa 3mm Thick

C0000205 20mm

Gold Magnetic Crimp Cap (10mm hole) with 20mm Natural PTFE/White Silicone Septa 3mm Thick.

Bi-Metallic Crimp Cap (8mm hole) Blue & Silver with 20mm Natural PTFE/White Silicone Septa 3mm Thick.







Ref.No.

Open Top Bi-Metallic Crimp Cap (8mm hole) Blue & Silver with 20mm Natural PTFE/Natural Silicone

Open Top Gold Magnetic Crimp Cap (10mm hole) with 20mm White PTFE/Blue Silicone Septa 3mm Thick.

Open Top Aluminum Crimp Cap (10mm hole) with Moulded Grey PTFE/Butyl Septa one ring 3mm Thick.







Ref.No.

Open Top Description

Bi-Metallic Crimp Cap (8mm hole) Red & Silver with 20mm Natural PTFE/Natural Silicone Septa 3mm Thick.

C0000952

100pcs/pk

20mm Open Top with 20mm Natural PTFE/Natural Silicone

Bi-Metallic Crimp Cap (8mm hole) Gold & Silver Septa 3mm Thick.

C0001012 20.2mm Open Top

Aluminum Crimp Cap (10mm hole) with Moulded Pharma-fix-septa Grey PTFE/Butyl 3mm thick.

20mm Butyl Septa



C0000407



C0000433









C0000423

| Nei.No. | 00000407 |
|------------|-------------|
| | 20mm |
| escription | Moulded Gre |

PTFE/Butyl Septa one ring 3mm thick.

Moulded Grey Butyl Injection Stopper.

C0000448 Moulded Grey Butyl Septa one ring. 3mm thick

C0000449 Moulded Grey Butyl Septa both rings.

Grey PTFE/Butyl without ring. 3mm thick.

C0000450

Moulded Pharma-fix-septa Grey PTFE/Butyl

Customized Service

· Logo printing, Package Label, Cap Color, Septa Size and Septa Color, all of them can be customized based on huge quantities.











C0000753 2mL Amber Glass

2mL Clear Glass 12x32mm Flat Base Description 8-425 Screw Thread Vial with Label and ALWSCI Printing.

2mL Amber Glass 12x32mm Flat Base 8-425 Screw Thread Vial with Label and ALWSCI Printing.

2mL Clear Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label and ALWSCI Printing.

12x32mm Flat Base 9-425 Screw Thread Vial with Label and ALWSCI Printing.









Ref.No. C0000754

Ref.No.

2mL Clear Glass Flat Base Description 11mm Crimp Vial Wide Opening with Label and ALWSCI Printing.

C0000755

2mL Amber Glass Flat Base 11mm Crimp Vial Wide Opening with Label and ALWSCI Printing.

C0000756

2mL Clear Glass Flat Base 11mm Snap Vial Wide Opening with Label and ALWSCI Printing.

C0000757

2mL Amber Glass Flat Base 11mm Snap Vial Wide Opening with Label and ALWSCI Printing.







Blue PTFE/White Silicone Septa. 14.7x3mm (UltraClean).

C0001140

11mm Transparent TEF/Butyl Red/ Natural Rubber Red-orange Septa.






Ref.No. C0001415 ***

Description

Blue Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone Septa 3mm Thick.

* OEM services of any other color caps are available.

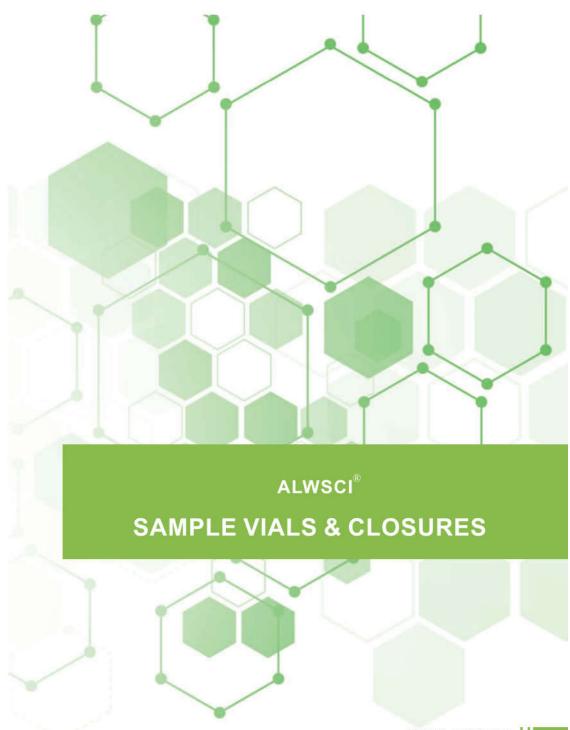

Sample Vials & Closures

Sample Vials & Closures

- · Screw vials for storage purpose, vials with different volumes are available.
- · Vial Color: Clear, Amber.
- · Cap Color: White, Black, Red, Blue, Yellow, Green, etc.
- . Septa material: PE, PTFE/Silicone, Silicone only, etc.
- · Pre-assemble service is available.





Storage Cap & Septa



24-400 Closures With Sample Vial

- · If you are doing any sampling, testing, or validation, you need to make sure the results were not skewed by a contaminant that may have come from the container.
- · Teflon lined caps and protective dust covers.
- · Superior vial-to-vial consistency.



C0001144

Ref.No.

Ref.No.

20mL Clear Glass Sample Vial. Description

with 24-400 Black Closed Top PP Cap with 22mm Natural PTFE/White Silicone Septa 1.5mm thick.



C0001417

20mL Amber Glass Sample Vial. with 24-400 White Closed Top PP Cap with 22mm Natural PTFE/White Silicone Septa 1.5mm thick.

Vial+Cap+Septa are pre-assembled together.100pcs/pk.



C0001096

Clear Glass Vial Description

24-400 White Open Top PP Screw Cap and Natural PTFE/White Silicone 3mm Thick Septa.



C0001125

40ml Amber Glass Vial 24-400 White Open Top PP Screw Cap and Natural PTFE/White Silicone 3mm Thick Septa.

Vial + Cap + Septa will be pre-assembled together. 72pcs/pk



Ref.No. C0001206

Description

24-400 White Open Top PP Screw Cap and Natural PTFE/White Silicone



C0001207

Amber Glass Vial 24-400 White Open Top PP Screw Cap and Natural PTFE/White Silicone

Vial + Cap + Septa will be pre-assembled together. 100pcs/pk.

Sample Vial Kit Package



Ref.No. C0001316

Clear Glass Sample Vial

Description with 13-425 Red Closed Top PP Screw Cap and Red PTFE/White Silicone 1mm Thick Septa. C0001317

C0001319

Amher Glass Sample Vial with 13-425 Red Closed Top PP Screw Cap and Natural PTFE/White Silicone 1mm Thick Septa.

Vial + Cap + Septa are pre-assembled together. Packed with dividers. 144pcs/pk.



Ref.No. C0001327

Clear Glass Sample Vial 17x60mm Description with 15-425 White Closed Top PP Cap

with Natural PTFE/White Silicone Septa 1.0mm thick.

Amber Glass Sample Vial 17x60mm with 15-425 White Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.0mm thick.

Vial + Cap + Septa are pre-assembled together. Packed with dividers. 144pcs/pk.





Ref.No. C0001328

20mL Clear Glass Sample Vial.

Description

with 22mm Natural PTFE/White Silicone Septa 1.5mm thick.


with 24-400 White Closed Top PP Cap


C0001321 20mL Amber Glass Sample Vial.

with 24-400 White Closed Top PP Cap

with 22mm Natural PTFE/White Silicone Septa 1.5mm thick.

Vial + Cap + Septa are pre-assembled together. Packed with dividers. 144pcs/pk.





Ref.No. C0000802

20mL Clear Glass Vial. Description

27.5x58mm with 22-400 White Closed Top PP Cap and Silver Liner.

Vial + Cap + Septa are pre-assembled together. Packed with dividers. 100pcs/pk

C0000404 20mL Amber Glass Vial.

27.5x58mm with 22-400 White Closed Top PP Cap and Natural PTFE / White Silicone Septa.

Narrow Mouth Bottle

- · Boston bottles are widely used for packing of Pharmaceutical intermediate, High value-added chemicals, Fragrance sesame oil, and etc.
- . The PTFE/silicone perfect sealing is suitable for long time storage and transportation, PE liner is for an economical choice.
- · Pre-assemble service is available.









Ref.No. C0000115 Description Amber Glass 20-400 Boston Round Bottle. 32.8x78.58mm.

C0000116 Clear Glass 20-400 Boston Round Bottle. 32.8x78.58mm.

Amber Glass 20-400 Boston Round Bottle. 38.6x93.66mm.

Clear Glass 20-400 Boston Round Bottle. 38.6x93.66mm.

48pcs/ctn.



C0000121









| C0000121 | C0000122 | C0000123 | C0000124 |
|---|---|--|--|
| 120mL Amber Glass 22-400 Boston Round Bottle. 48.8x112.73mm. | 120mL Clear Glass 22-400 Boston Round Bottle. 48.8x112.73mm. | 250mL Amber Glass 24-400 Boston Round Bottle. 61.6x140.8mm. | 500mL Amber Glass 28-400 Boston B 83x176.5mm. |
| 24pcs/ctn. | 24pcs/ctn. | 30pcs/ctn. | 12pcs/ctn. |

C0000125 1000mL Amber Glass 33-400 Boston Round Bottle. 94x219mm. 8pcs/ctn.

> Narrow Mouth Bottle Closures









| | \$2000000000000000000000000000000000000 |
|-------------|---|
| Description | 20-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 2.0mm Thick. |
| | 48pcs/pk |

| | C0001127 |
|---|--|
| 0 | 20-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick. |
| | 48pcs/pk. |

| C0001128 |
|---|
| 22-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 2.0mm Thick. |
| 24pcs/pk. |

| C0001129 |
|--|
| 22-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick. |
| 24pcs/pk. |









| et.No. | C0001130 | |
|-----------|-------------|--|
| | 24-400 | |
| and allow | Black Close | |

Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.5mm Thick.

24-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick. 30pcs/pk.

30pcs/pk.

C0001131

C0000229 28-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.5mm Thick.

12pcs/pk.



28-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick. 12pcs/pk.







| Ref.No. | C000023 |
|---------|---------|
|---------|---------|

33-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.5mm Thick.

C0000233

33-400 Black Closed Top PP Cap with White PTFE Septa 0.5mm Thick.

C0000235

33-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick

8pcs/pk.

Ref.No. C0001126

Wide Mouth Bottle

- · Wide mouth bottles are widely used for packing of Pharmaceutical intermediate, High value-adde chemicals,
- · Offer Packaging customized service.









| Ref.No. | C0000105 |
|-------------|---|
| Description | 60mL Amber Glass 33-400 Wide Mouth Bottle 44.5x75.5mm. |
| | 48pcs/ctn. |





C0000108 120mL Amber Glass 38-400 Wide Mouth Bottle 52.8x95mm







Amber Glass

64x119mm.

24pcs/ctn.





C0000109 C0000110 150mL 200mL Amber Glass Amber Glass 45-400 Wide Mouth Bottle 56x100mm. 61.4x109.5mm. 24pcs/ctn.





45-400 Wide Mouth Bottle

| C0000112 | |
|---|--|
| 300mL Amber Glass 53-400 Wide Mouth Bottle 68.3x126.4mm. | |
| 24pcs/ctn. | |

C0000113 500mL Amber Glass 53-400 Wide Mouth Bottle 80.6x146.5mm. 12pcs/ctn.

> Wide Mouth Bottle Closures



| Ref.No. | C0000231 | |
|---------|----------|--|

33-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.5mm Thick.



C0000233 33-400 Black Closed Top PP Cap with White PTFE Septa 0.5mm Thick.

8pcs/pk.



33-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick.

C0000235





Ref.No. C0000255 38-400

Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.5mm Thick. 24pcs/pk.

C0000256 38-400 Black Closed Top PP Cap with White PTFE Septa

0.5mm Thick. 24pcs/pk.



Black Closed Top PP Cap

with White PE Septa 1.0mm Thick.

C0000257

38-400

Ref.No.

45-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Description Septa 1.5mm Thick. 24pcs/pk

C0000259

45-400 Black Closed Top PP Cap with White PTFE Septa

24pcs/pk



45-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick.





53-400 Black Closed Top PP Cap Description with Natural PTFE/White Silicone Septa 1.5mm Thick.

C0000262

53-400 Black Closed Top PP Cap with White PTFE Septa 0.5mm Thick.

12pcs/pk.



C0000263 53-400

Black Closed Top PP Cap with White PE Septa 1.0mm Thick.



Tools

. The tools of Vial Rack, Crimper, Decrimper, Safety Caps, GC Septa are widely matched with the chromatography consumables to use.

Vial Rack

- Easy handling and transportation of sample vials.
- · Stable standing position because of solid construction.







| Ref.No. | C0000094 | C0001067 | C0000095 | C0000096 |
|-------------|---|--|---|---|
| Description | PP Vial Rack 50 Positions for 2mL Vials Blue Color. | PP Vial Box 100 Positions for 2ml Vials Blue Color, 14x14x5cm. | PP Vial Rack 50 Positions for 4mL Vials Blue Color. | PP Vial Rack for EPA VOA Vials White Color. |
| | | | 1pc/pk | |

Crimper & Decrimper







| Ref.No. | C0000265 | C0000264 | C0000266 | C0000267 | C0000268 | C0000269 |
|-------------|--|--|--|--|---|---|
| Description | Crimper for 11mm Aluminum Crimp Cap Stainless Steel. | Crimper for 20mm Aluminum Crimp Cap Stainless Steel. | Stainless Steel Crimper for 13mm Flip off Cap. | Stainless Steel Crimper for 20mm Flip off Cap. | Decrimper for 11mm Aluminum Crimp Cap Stainless Steel. | Decrimper for 20mm Aluminum Crimp Cap Stainless Steel. |
| | | | 1pc/ | ok . | | |

Safety Caps Thread GL45

- · GL45 screw cap is also called mobile phase safety cap.
- . Inner PTFE can be rotation smooth to make sure the connected tube is flexible.
- . Blue, Red, Yellow color are available, corresponding fitting and plug are available as well.









C0000273



C0000274

Ref.No. C0000270 GL45 Safety Cap Description for 1/8 inch OD tubing.

GL45 Safety Cap with Three holes for 1/8 inch OD tubing.

C0000271

C0000272 Yellow GL45 Safety Cap with Four holes for 1/8 inch OD tubing. 100pcs/pk

GL45 Safety Cap withTwo holes for 1/16 inch OD tubing.

GL45 Safety Cap for 1/16 inch OD tubing.







C0000970





C0000971

Ref.No. C0000275

GL45 Safety Cap with Four holes for 1/16 inch OD tubing.

PEEK Fitting for 1/16" OD Tubing Natural Color.

C0000969

PEEK Fitting for 1/8" OD Tubing Natural Color.

PEEK Blind Plug Natural Color.

GC Septa

- . GC septa are used in gas chromatography (GC).
- . These GC accessories need to introduce the sample without leakage and withstand the high-temperatures of laboratory ovens.

















High Temp Ultra Low Bleed GC Septa11x3mm Pre-Pierced. Used up to 320°C.



C0000403



C0000800

High Temp Ultra Low Bleed GC Septa 11x3mm. Used up to 320°C.



Orange GC Plug Septa, Ultra Low Bleed Septa, Used Up To 320°C

For Shimadzu.



Used up to 250°C.

Normal Silicone Septa









Ref.No. C0000982 Normal Silicone Septa Description Used up to 250°C.

Normal Silicone Septa Used up to 250°C.

50pcs/pk





Welded Syringe Filter

φ30mm φ25mm φ13mm
Pore size:0.22μm/0.45μm



- Filtration is achieved by pushing the sample through the membrane with a syringe or other luer-connection device.
- Syringe Filters allow you to control the rate off low, which can be critical with delicate samples. It also allows
 you to filter into nearly any tube, vial, or column that represents the next step in your analysis.

Syringe Filter Selection Guide

- · Syringe filters are used for many routine preparation steps in laboratories all over the world.
- · They are convenient, ready-to use disposables for removal of particles from solutions and gases.
- · LABFIL syringe filters are for a wide range of applications.
- The filters are clean and safe as they are virtually free of leachables and extractables and reliably remove particles and microorganisms without any leakage.

| Syringe Filter Capacities | Sample Volume |
|---------------------------|---------------------|
| 13mm Syringe Filter | less or equal 10mL |
| 25mm Syringe Filter | less or equal 100mL |
| 30mm Syringe Filter | less or equal 150mL |


| Pre-Cut Membrane Capacities | Sample Volume |
|------------------------------------|---------------|
| 13mm Pre-Cut Membranes | up to 20mL |
| 25mm Pre-Cut Membranes | up to 100mL |
| 47mm Pre-Cut Membranes | multi-liter |

Membrane Selection Guide

Choosing a membrane filter is based on the size and amount of particulate in the sample, the membrane's
chemical compatibility with the sample matrix, and potential interactions (binding) between the membranes
and the sample components. This table offers general guidelines on membrane characteristics and
applications.

Membrane Selection Guide

| Membrane Type | Features | Common Uses |
|-----------------------------------|--|--|
| Nylon | Good chemical compatibility and very low extractables | General filtrationsterilization, HPLC sample prep |
| Polytetrafluoroethylene (PTFE) | Compatible with strong acids and aggressive solvents | Gas, Air, and Solvent filtration |
| Polyvinylidene Fluoride (PVDF) | Good flow rate characteristics. Ideal for chromatography applications. | HPLC sample preparation and General filtration |

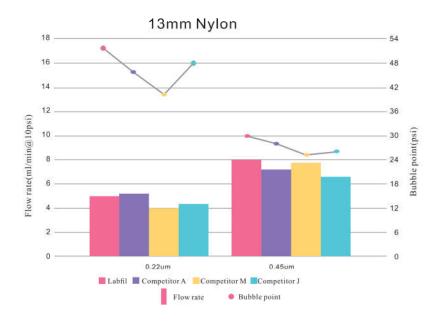

Nylon

- · High mechanical and tensile strength.
- · Used for most organic solvents and mid-polar liquids.
- Two types in pore size:0.22μm and 0.45μm.
- . Three types in filter size:13mm, 25mm and 30mm.



Typical data

| Material | N | ylon |
|---------------------------------|---------------------------|--------------|
| Material of housing | рр | |
| Effective filtration area(cm²) | 13mm/1.13cm² 25mm/4.15cm² | |
| Pore size(µm) | 0.22/0.45 | |
| Process volume(ml) | <10ml(13mm) | <100ml(25mm) |
| Maximum Operating Temperature | 100℃ | |
| Maximum Operating Pressure(psi) | 87psi | |









| Ref.No. | C0000277 |
|-------------|--|
| Description | 13mm Nylon Welded Syringe Filter 0.22um with Printing. |





| C0000280 |
|---------------------------------|
| 25mm Nylon |
| Welded Syringe Filter 0.45um |
| with Printing. |

Features

- This Nylon+PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- One of the most commonly used membranes; broad compatibility with aqueous and organic solvents, with stable hydrophilicity, not suitable for highly acidic samples.

Applications

- · Used for most organic solvents mixtures and mid-polar liquids.
- · Chemical filtration and Beverage filtration.
- . Note: Nylon binds protein, do not use when high protein recovery is desired.

PES

- High flow rates(liquids), low protein binding, low concentrations of extractable substances.
- Low-affinity for proteins and extractable with substantially faster flow rates than PVDF; suitable for pre-filtration and filtration of buffers and culture media.



· Three types in filter size:13mm, 25mm and 30mm.



Typical data

| Material | PES | |
|---------------------------------|--------------------------|--------------------------|
| Material of housing | рр | |
| Effective filtration area(cm²) | 13mm/1.13cm ² | 25mm/4.15cm ² |
| Pore size(µm) | 0.22/0.45 | |
| Process volume(ml) | <10ml(13mm) | <100ml(25mm) |
| Maximum Operating Temperature | 90°C | |
| Maximum Operating Pressure(psi) | 87psi | |









| Ref.No. | C0000293 | |
|-------------|--|--|
| Description | 13mm PES Welded Syringe Filter 0.22um with Printing. | |

13mm
PES
Welded Syringe Filter
0.45um
with Printing.

C0000294

25mm PES Welded Syringe Filter 0.22um with Printing.

C0000295

C0000296

25mm
PES
Welded Syringe Fitter
0.45um
with Printing.

Features

- · This PES+PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- . Faster flow rate than PVDF.
- · Excellent thermal resistance and chemical resistance.

- PES is certified for ion chromatography; tissue culture media; filtration of proteins and nucleic acids.
- . Suitable for filtration of aqueous solution with high throughput.

PTFE Hydrophilic

- · For removing particulates, reducing signal-to-noise ratios andmaintaining flat baselines.
- · Filtering aqueous and organic solutions.
- Two types in pore size:0.22μm and 0.45μm.
- . Three types in filter size:13mm, 25mm and 30mm.



Typical data

| Material | PTFE Hydrophilic | | |
|---------------------------------|---|--------------|--|
| Material of housing | рр | | |
| Effective filtration area(cm²) | 13mm/1.13cm ² 25mm/4.15cm ² | | |
| Pore size(µm) | 0.22/0.45 | | |
| Process volume(ml) | <10ml(13mm) | <100ml(25mm) | |
| Maximum Operating Temperature | 130℃ | | |
| Maximum Operating Pressure(psi) | 87psi | | |









| Ref.No. | C0000281 |
|-------------|---|
| Description | 13mm PTFE Hydrophilic Welded Syringe Filter 0.22um with Printing. |





C0000284 25mm PTFE Hydrophilic Welded Syringe Filter

100pcs/pk

Features

- This PTFE+PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- · Broad chemical compatibility choose for filtering aqueous and organic solutions low protein binding.

Applications

- · Industrial Chromatography.
- · Filtration of aqueous solutions as well as organic solvents and chemicals.

PTFE Hydrophobic

- · High mechanical and tensile strength.
- · Used for most organic solvents and mid-polar liquids.
- Two types in pore size:0.22µm and 0.45µm.
- · Three types in filter size:13mm, 25mm and 30mm.



Typical data

| Material | PTFE Hydrophobic | |
|---------------------------------|--------------------------|--------------|
| Material of housing | рр | |
| Effective filtration area(cm²) | 13mm/1.13cm ² | 25mm/4.15cm² |
| Pore size(µm) | 0.22/0.45 | |
| Process volume(ml) | <10ml(13mm) | <100ml(25mm) |
| Maximum Operating Temperature | 130℃ | |
| Maximum Operating Pressure(psi) | 87psi | |









| Description | |
|-------------|--|
| | |

Ref.No.

13mm PTFE Hydrophobic Welded Syringe Filter with Printing.

C0000297

C0000298 13mm PTFE Hydrophobic Welded Syringe Filter with Printing.

25mm PTFE Hydrophobic Welded Syringe Filter with Printing.

C0000299

C0000300 25mm PTFE Hydrophobic Welded Syringe Filter with Printing.

Features

- This PTFE+PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- · Hydrophobic PTFE membrane has great temperature resistance.
- · Suitable for Solvents/Gases/Acids/Bases.

- · Degassing/Clarifying aqueous samples.
- · Removal of protein precipitates.
- · Strong acid solvent filtration and Alkali solvent filtration.
- · Biofuel analysis.

PVDF Hydrophilic

- . Low protein-binding for filtration of non-aggressive aqueous and mild organic solutions.
- . Low UV absorbing extractables and low nonspecific protein
- Two types in pore size:0.22µm and 0.45µm.
- . Three types in filter size:13mm, 25mm and 30mm.



Typical data

| Material | PVDF Hydrophilic | |
|---------------------------------|--------------------------|--------------|
| Material of housing | PP | |
| Effective filtration area(cm²) | 13mm/1.13cm ² | 25mm/4.15cm² |
| Pore size(µm) | 0.22/0.45 | |
| Process volume(ml) | <10ml(13mm) | <100ml(25mm) |
| Maximum Operating Temperature | 100℃ | |
| Maximum Operating Pressure(psi) | 87psi | |
| | | |









| Ref.No. | C0000289 |
|-------------|--|
| Description | 13mm PVDF Hydrophilic Welded Syringe Filte 0.22um |

C0000290 PVDF Hydrophilic Welded Syringe Filter 0.45um with Printing.

PVDF Hydrophilic Welded Syringe Filter with Printing

C0000291

C0000292 25mm PVDF Hydrophilic Welded Syringe Filter with Printing.

Features

- . This PVDF +PP pre-filter provides two times greater throughput than standard filter without
- · Hydrophilic membrane with good solvent resistance.

Applications

- · Sterilizing/Clarifying filtration of biological solutions.
- · Excellent chemical compatibility, even with aggressive acids and alcohols.
- · Filtration of samples where high protein recovery is desired.

PVDF Hydrophobic

- · Filtration of water-soluble oligomers and polymers, e.g. protein solutions.
- · Filtration of hydrophobic substances in different organic solvents.
- Two types in pore size:0.22µm and 0.45µm.
- · Three types in filter size:13mm, 25mm and 30mm.



Typical data

| Material | PVDF Hydrophobic | |
|---------------------------------|---|--------------|
| Material of housing | pp | |
| Effective filtration area(cm²) | 13mm/1.13cm ² 25mm/4.15cm ² | |
| Pore size(µm) | 0.22/0.45 | |
| Process volume(ml) | <10ml(13mm) | <100ml(25mm) |
| Maximum Operating Temperature | 100℃ | |
| Maximum Operating Pressure(psi) | 87psi | |









| Ref.No. | C0000285 |
|-------------|---|
| Description | 13mm PVDF Hydro Welded Syrir 0.22um with Printing |

PVDF Hydrophobic Welded Syringe Filter

C0000286 C0000287 PVDF Hydrophobic Welded Syringe Filter 0.45um

100pcs/pk

25mm PVDF Hydrophobic Welded Syringe Filter 0.22um

C0000288 25mm PVDF Hydrophobic Welded Syringe Filter 0.45um

Features

- . This PVDF + PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- · This membrane features stability and hydrophobic interactions which is similar to PTFE.

- · Gas filtration, Vapor filtration, High-temperature filtration.
- · Food industry and Medicine filtration.

CA

- · CA membranes are use in tissue culture media filtration.
- · Ideally suited for general filtration and biological/clinical analyse requiring maximum protein recovery.
- · High temperature stability can use with heated liquids.
- Two Types in pore size:0.22μm and 0.45μm.
- . Three types in filter size:13mm, 25mm and 30mm.



Typical data

| Material | CA | |
|---------------------------------|--------------------------|--------------|
| Material of housing | pp | |
| Effective filtration area(cm²) | 13mm/1.13cm ² | 25mm/4.15cm² |
| Pore size(µm) | 0.22/0.45 | |
| Process volume(ml) | <10ml(13mm) | <100ml(25mm) |
| Maximum Operating Temperature | 50℃ | |
| Maximum Operating Pressure(psi) | 87psi | |









| Ref.No. | C0000760 | |
|-------------|---|--|
| Description | 13mm CA Welded Syringe Filter 0.22um with Printing. | |





C0000302 25mm CA Welded Syringe Filter with Printing.

Features

- This CA+PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- · Naturally hydrophilic membrane filter.
- . Low protein binding: great for protein solutions, such as protein isolation pre-filtration.
- · Suitable for ground water filtration.
- · Uniform pore size structure.

Applications

- · Filtration of liquid samples and some organic solvents.
- · Cell retention and particle retention.
- · Light scattering measurement.
- · Sterilization of liquids.

RC

- . The best option for reliable and leachable free sterilisation of liquids.
- · The very low non-specific binding characteristics of this membrane makes it a perfect choice for biomolecule solutions and other dissolved
- Two types in pore size:0.22μm and 0.45μm.
- . Three types in filter size:13mm, 25mm and 30mm.



Typical data

| Material | RC | |
|---------------------------------|--------------|--------------|
| Material of housing | pp | |
| Effective filtration area(cm²) | 13mm/1.13cm² | 25mm/4.15cm² |
| Pore size(µm) | 0.22/0.45 | |
| Process volume(ml) | <10ml(13mm) | <100ml(25mm) |
| Maximum Operating Temperature | 100℃ | |
| Maximum Operating Pressure(psi) | 87psi | |









| Ref.No. | C0001179 |
|-------------|---|
| Description | 13mm RC Welded Syringe Filte 0.22um. |
| | |

C0001180 13mm Welded Syringe Filter 100pcs/pk C0001181 25mm Welded Syringe Filter

C0001182 25mm RC Welded Syringe Filter

Features

- This RC+PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- · Outperforming chemical compatibility choose for biomolecule solutions and other dissolved substances.

- · Industrial Chromatography
- · Filtration of aqueous solutions as well as organic solvents and chemicals.



Labfil®

ECONOMY SYRINGE FILTER



 ϕ 33mm ϕ 25mm ϕ 13mm Pore size:0.22 μ m/0.45 μ m











Economy Syringe Filter

- · In order to meet different customers' request, LABFIL supply the syringe filters with outer ring as well.
- · It's available in many different pore sizes and with several hydrophilic or hydrophobic membrane materials.
- · More Economic.
- · Reliable removal of microorganisms and particles from liquids for HPLC sample preparation.
- · High mechanical and tensile strength.

| Туре | Color 0.45µm | Color 0.22µm |
|-------------------------------|-----------------|-----------------|
| MCE | Green | Light Green |
| NY | Yellow | Light Yellow |
| PES | Green | Light Green |
| PVDF(Hydrophilic/Hydrophobic) | Purple | Light Purple |
| PTFE(Hydrophilic/Hydrophobic) | Red | Pink |

Economy Syringe Filter

Nylon

- · High mechanical and tensile strength.
- · Universal application for analytical procedures.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm and 33mm.



Typical data

| Material | Nylon | |
|---------------------------------|--------------------------|--------------|
| Material of housing | pp | |
| Effective filtration area(cm²) | 13mm/1.13cm ² | 25mm/4.15cm² |
| Pore size(µm) | 0.22/0.45 | |
| Process volume(ml) | <10ml(13mm) | <100ml(25mm) |
| Maximum Operating Temperature | 100℃ | |
| Maximum Operating Pressure(psi) | 87psi | |









| Ref.No. | C0000602 | C0000603 | C0000604 | C0000605 |
|-------------|---|---|---|---|
| Description | 13mm Nylon Syringe Filter 0.22um with Outer Ring. | 13mm Nyion Syringe Filter 0.45um with Outer Ring. | 25mm Nylon Syringe Filter 0.22um with Outer Ring. | 13mm Nylon Syringe Filter 0.45um with Outer Ring. |
| | | 100pcs/ | pk | |

Features

- · One of the most commonly used membranes.
- · Broad compatibility with aqueous and organic solvents, with stable hydrophilicity, not suitable for highly acidic samples.

Applications

- · Used for most organic solvents mixtures and mid-polar liquids.
- · Chemical filtration and Beverage filtration.
- · Note: Nylon binds protein, do not use when high protein recovery is desired.

PES

- · High mechanical and tensile strength.
- · Used for most organic solvents and mid-polar liquids.
- Two types in pore size:0.22μm and 0.45μm.
- · Three types in filter size:13mm, 25mm and 33mm.



Typical data

| Material | PES | | |
|---------------------------------|--------------------------|--------------|--|
| Material of housing | pp | | |
| Effective filtration area(cm²) | 13mm/1.13cm ² | 25mm/4.15cm² | |
| Pore size(µm) | 0.22/0.45 | | |
| Process volume(ml) | <10ml(13mm) | <100ml(25mm) | |
| Maximum Operating Temperature | 90℃ | | |
| Maximum Operating Pressure(psi) | 87psi | | |









| Ref.No. | C0000622 | C0000623 | C0000624 | C0000625 |
|-------------|---|---|---|---|
| Description | 13mm PES Syringe Filter 0.22um with Outer Ring. | 13mm PES Syringe Filter 0.45um with Outer Ring. | 25mm PES Syringe Filter 0.22um with Outer Ring. | 25mm PES Syringe Filter 0.45um with Outer Ring. |

Features

- · Excellent thermal resistance and chemical resistance.
- · Having high flow rates thanks to their symmetric structure .
- · A low protein adsorption, recommended for filtration of protein filtration as well as aqueous solutions filtration.
- . The low level extractables makes them suitable for environmental analysis.

- · PES is certified for ion chromatography; tissue culture media; filtration of proteins and nucleic acids.
- · Suitable for filtration of aqueous solution with high throughput.

Economy Syringe Filter

8

PTFE Hydrophobic

- Hydrophobic PTFE syringe filters have broad chemical compatibility and high pH resistance.
- Versatile filters for use with aggressive organic solvent-based solutions and are especially ideal for HPLC sample preparation.
- Two types in pore size:0.22µm and 0.45µm.
- . Three types in filter size:13mm, 25mm and 33mm.



Typical data

| Material | PTFE Hy | drophobic |
|---------------------------------|--------------|--------------|
| Material of housing | pp | |
| Effective filtration area(cm²) | 13mm/1.13cm² | 25mm/4.15cm² |
| Pore size(µm) | 0.22/0.45 | |
| Process volume(ml) | <10ml(13mm) | <100ml(25mm) |
| Maximum Operating Temperature | 130°C | |
| Maximum Operating Pressure(psi) | 87psi | |

| | 080 | 000 | 000 | 000 |
|-------------|--|--|--|--|
| Ref.No. | C0000610 | C0000611 | C0000612 | C0000613 |
| Description | 13mm PTFE Hydrophobic Syringe Filter 0.22um with Outer Ring. | 13mm PTFE Hydrophobic Syringe Filter 0.45um with Outer Ring. | 25mm PTFE Hydrophobic Syringe Filter 0.22um with Outer Ring. | 13mm PTFE Hydrophobic Syringe Filter 0.45um with Outer Ring. |

Features


- · Hydrophobic PTFE membrane has great temperature resistance.
- · Suitable for Solvents/Gases/Acids/Bases.
- Excellent chemical compatibility for filtering harsh chemicals that destroy other membrane materials and ideal for aerosol sampling.


Applications

- · Degassing/Clarifying aqueous samples.
- · Removal of protein precipitates.
- · Strong acid solvent filtration and Alkali solvent filtration.
- · Biofuel analysis.

PTFE Hydrophilic

- Hydrophilic materials are obtained through process improvement.
- Hydrophilic material has a great affinity for water and it's easily wetted by water because of the surface with water mole cules to form intermolecular foces.





- · High mechanical and tensile strength.
- · Used for most organic solvents and mid-polar liquids.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm and 33mm.



Typical data

| Material | PTFE H | ydrophilic |
|---------------------------------|--------------|--------------|
| Material of housing | pp | |
| Effective filtration area(cm²) | 13mm/1.13cm² | 25mm/4.15cm² |
| Pore size(µm) | 0.22/0.45 | |
| Process volume(ml) | <10ml(13mm) | <100ml(25mm) |
| Maximum Operating Temperature | 11 | 30°C |
| Maximum Operating Pressure(psi) | 87psi | |



Features

- · Broad chemical compatibility choose for filtering aqueous and organic solutions low protein binding.
- · Low IC extractables.

- · Industrial Chromatography.
- · Filtration of aqueous solutions as well as organic solvents and chemicals.

Economy Syringe

PVDF Hydrophobic

- · Filtration of water-soluble oligomers and polymers, e.g. protein solutions.
- · Filtration of hydrophobic substances in different organic solvents.
- Two types in pore size:0.22μm and 0.45μm.
- . Three types in filter size:13mm, 25mm and 33mm.



Typical data

| Material | PVDF Hydrophobic | | |
|---------------------------------|--------------------------|--------------|--|
| Material of housing | pp | | |
| Effective filtration area(cm²) | 13mm/1.13cm ² | 25mm/4.15cm² | |
| Pore size(µm) | 0.22/0.45 | | |
| Process volume(ml) | <10ml(13mm) | <100ml(25mm) | |
| Maximum Operating Temperature | 100℃ | | |
| Maximum Operating Pressure(psi) | 87psi | | |









| Ref.No. | C0000618 | C0000619 | C0000620 | C0000621 |
|-------------|--|--|--|--|
| Description | 13mm PVDF Hydrophobic Syringe Filter 0.22um with Outer Ring. | 13mm PVDF Hydrophobic Syringe Filter 0.45um with Outer Ring. | 25mm PVDF Hydrophobic Syringe Filter 0.22um with Outer Ring. | 13mm PVDF Hydrophobic Syringe Filter 0.45um with Outer Ring. |
| | | 100pcs/p | k | |

Features

- . This membrane features stability and hydrophobic interactions which is similar to PTFE.
- · Naturally hydrophobic membrane provides excellent flow rates and high loading.
- · Exceptional temperature stability provides extended sampling range over other membranes.


Applications

- · Gas filtration, Vapor filtration, High-temperature filtration.
- · Food industry and Medicine filtration.

PVDF Hydrophilic

- · Hydrophilic materials are obtained through process improvement.
- · Hydrophilic material has a great affinity for water and it's easily wetted by water because of the surface with water mole cules to form intermolecular foces.





- · Low protein-binding for filtration of non-aggressive aqueous and mild organic solutions.
- · Low UV absorbing extractables and low nonspecific protein binding.
- Two types in pore size:0.22µm and 0.45µm.
- · Three types in filter size:13mm, 25mm and 33mm.



Typical data

| Material | PVDF H | ydrophilic |
|---------------------------------|--------------------------|--------------|
| Material of housing | pp | |
| Effective filtration area(cm²) | 13mm/1.13cm ² | 25mm/4.15cm² |
| Pore size(µm) | 0.22/0.45 | |
| Process volume(ml) | <10ml(13mm) | <100ml(25mm) |
| Maximum Operating Temperature | 100°C | |
| Maximum Operating Pressure(psi) | 87psi | |











| Ref.No. | C0000614 | C0000615 | C0000616 | C0000617 |
|-------------|--|--|--|--|
| Description | 13mm PVDF Hydrophilic Syringe Filter 0.22um with Outer Ring. | 13mm PVDF Hydrophilic Syringe Filter 0.45um with Outer Ring. | 25mm PVDF Hydrophilic Syringe Filter 0.22um with Outer Ring. | 25mm PVDF Hydrophilic Syringe Filter 0.45um with Outer Ring. |
| | | 100pcs/ | ok | |
| | | | | |

Features

- · Hydrophilic membrane with good solvent resistance.
- · It has superior performance to prevent leak of sample solvent and can promise membrane area being used in a large filtration area.

- · Sterilizing/Clarifying filtration of biological solutions.
- · Excellent chemical compatibility, even with aggressive acids and alcohols.
- · Filtration of samples where high protein recovery is desired.

MCE

- · Biologically inert mixtures of cellulose acetate and cellulose nitrate.
- · Membranes in analytical and research applications.
- Two types in pore size:0.22μm and 0.45μm.
- . Three types in filter size:13mm, 25mm, 33mm.



Typical data


| Material | MCE | | |
|---------------------------------|---|--------------|--|
| Material of housing | pp | | |
| Effective filtration area(cm²) | 13mm/1.13cm ² 25mm/4.15cm ² | | |
| Pore size(µm) | 0.22/0.45 | | |
| Process volume(ml) | <10ml(13mm) | <100ml(25mm) | |
| Maximum Operating Temperature | 50°C | | |
| Maximum Operating Pressure(psi) | 87psi | | |



Features

- · Ideal for capturing and culturing microorganisms in the Water and wastewater industry.
- · Used to determine particulate contamination of lubricating oil and hydraulic fluid in patch test kits.
- · Compatible with gamma irradiation.

- · Appropriate for bacterial culturing, including E. coli culturing
- · Biologically inert with good thermal stability
- . Uniform microporous structure results in high flow rates when used for filtering

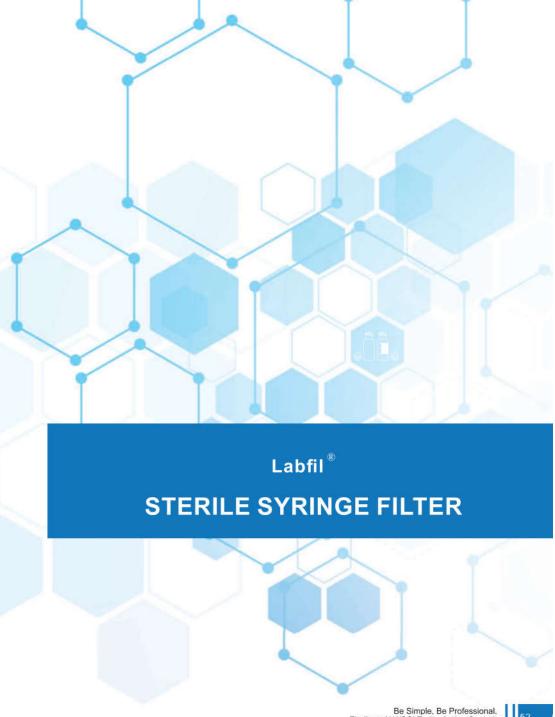

Sterile Syringe Filter

Sterile Syringe Filter

Nylon

- · 100% integrity tested.
- · Individually packaged.
- . Ideal for sterile filtration.
- · Low extractables, high protein binding; recommended for alcohols and weak solvents.



PTFE

- · 100% integrity tested.
- · Individually packaged.
- · Ideal for sterile filtration.
- · For degassing/clarifying aqueous and solvent samples.









| C0000528 | C0000529 | C0000530 | C0000531 |
|--|--|--|--|
| Sterile 13mm PTFE Hydrophilic Syringe Filter 0.22um with Outer Ring. | Sterile 13mm PTFE Hydrophilic Syringe Filter 0.45um with Outer Ring. | Sterile 25mm PTFE Hydrophilic Syringe Filter 0.22um with Outer Ring. | Sterile 25mm PTFE Hydrophilic Syringe Filter 0.45um with Outer Ring. |
| 100pcs/pk | | 50pcs | pk |
| | Sterile 13mm PTFE Hydrophilic Syringe Filter 0.22um with Outer Ring. | Sterile Sterile 13mm PTFE Hydrophilic Syringe Filter 0.22um 0.45um | Sterile Sterile Sterile 25mm 13mm 27FE Hydrophilic Syringe Filter 0.22um with Outer Ring. Sterile 25mm PTFE Hydrophilic Syringe Filter 0.22um with Outer Ring. Sterile 25mm PTFE Hydrophilic Syringe Filter 0.22um with Outer Ring. with Outer Ring. |

PTFE Hydrophobic









| Ref.No. | C0000532 | C0000533 | C0000534 | C0000535 |
|-------------|--|--|--|--|
| Description | Sterile 13mm PTFE Hydrophobic Syringe Filter 0.22um with Outer Ring. | Sterile 13mm PTFE Hydrophobic Syringe Filter 0.45um with Outer Ring. | Sterile 25mm PTFE Hydrophobic Syringe Filter 0.22um with Outer Ring. | Sterile 25mm PTFE Hydrophobic Syringe Filter 0.45um with Outer Ring. |
| | 100pcs/pk | | 50pcs/s | pk |

PES

- · 100% integrity tested.
- · Individually packaged.
- · Ideal for sterile filtration.
- · For medical use, sterile filtering protein solution, tissue culture media, additives.







| Ref.No. | C0000544 | C0000545 | C0000546 | C0000547 |
|-------------|---|---|---|---|
| Description | Sterile 13mm PES Syringe Filter 0.22um with Outer Ring. | Sterile 13mm PES Syringe Filter 0.45um with Outer Ring. | Sterile 25mm PES Syringe Filter 0.22um with Outer Ring. | Sterile 25mm PES Syringe Fliter 0.45um with Outer Ring. |
| 100pcs/pk | | 500 | ics/pk | |

PVDF

- · 100% integrity tested.
- · Individually packaged.
- · For sterilization/clarification of water, buffers, and salt solutions.

PVDF Hydrophilic







| Ref.No. | C0000536 | C0000537 | C0000538 | C0000539 |
|-------------|--|--|--|--|
| Description | Sterile 13mm PVDF Hydrophilic Syringe Filter 0.22um with Outer Ring. | Sterile 13mm PVDF Hydrophilic Syringe Filter 0.45um with Outer Ring. | Sterile 25mm PVDF Hydrophilic Syringe Filter 0.22um with Outer Ring. | Sterile 25mm PVDF Hydrophilic Syringe Filter 0.45um with Outer Ring. |
| 100pcs/pk | | 50pcs/pk | | |

PVDF Hydrophobic







| Ref.No. | C0000540 | C0000541 | C0000542 | C0000543 |
|-------------|--|--|--|--|
| Description | Sterile 13mm PVDF Hydrophobic Syringe Filter 0.22um with Outer Ring. | Sterile 13mm PVDF Hydrophobic Syringe Filter 0.45um with Outer Ring. | Sterile 25mm PVDF Hydrophobic Syringe Filter 0,22um with Outer Ring. | Sterile 25mm PVDF Hydrophobic Syringe Filter 0.45um with Outer Ring. |
| 100pcs/pk | | 50pcs/pk | | |



Labfil® MEMBRANE FILTER



 Biologically inert mixtures of cellulose acetate and cellulose nitrate have made sterile MCE membrane filters one of the most widely used membranes in analytical and research applications.







| Ref.No. | C0001244 | C0001243 | |
|-------------|--|--|--|
| Description | 47mm Sterile MCE Grid Membrane White Membrane/Black 0.22um. | 47mm Sterile MCE Grid Membrane White Membrane/Black 0.45um. | |
| | | 100pcs/pk | |

Features

- · Ideal for capturing and culturing microorganisms in the Water and wastewater industry.
- · Used to determine particulate contamination of lubricating oil and hydraulic fluid in patch test kits.
- Available in pore sizes 0.22um and 0.45um, colored black, with a gridded surface.
- · Compatible with gamma irradiation.

Membrane Filter

- · Membrane filters or "membranes" are polymer films with specific pore ratings.
- Membranes retain particles and microorganisms that exceed their pore ratings by acting as a physical barrier and capturing such particles on the surface of the membrane.
- · Labfil membranes are available in a variety of polymers, pore sizes, diameters, and surface types.







Membrane Filter

- · Membrane filters or "membranes" are polymer films with specific pore ratings.
- Membranes retain particles and microorganisms that exceed their pore ratings by acting as a physical barrier and capturing such particles on the surface of the membrane.
- · Labfil membranes are available in a variety of polymers, pore sizes, diameters, and surface types.

| Image | Туре | Dimension(mm) | Pore Size | Item No. | Packing |
|---|-------------------|---------------|-----------|----------|-----------|
| (a) (b) (b) (c) | | 47mm | 0.22µm | C0000875 | 100===/=! |
| | | | 0.45µm | C0000876 | 100pcs/pk |
| 0 00 (9 3 | CA | 0.0 | 0.22µm | C0000877 | 100pcs/pk |
| 0.000 | | 90mm | 0.45µm | C0000878 | TOOPCS/pk |
| S-33-6 | | 47mm | 0.22µm | C0000311 | 100pcs/pk |
| | MCE | | 0.45µm | C0000313 | TOOPCS/pk |
| | MCE | 00 | 0.22µm | C0000312 | 100pcs/pk |
| | | 90mm | 0.45µm | C0000314 | TOOPCS/pk |
| 250 | | | 0.22µm | C0000303 | 100pcs/pk |
| | KERE | 47mm | 0.45µm | C0000305 | TOOPCS/pk |
| | Nylon | 00 | 0.22µm | C0000304 | 100pcs/pk |
| and other test | | 90mm | 0.45µm | C0000306 | Toopes/pk |
| | PES | 47mm | 0.22µm | C0000891 | 100pcs/pk |
| | | | 0.45µm | C0000892 | 100pcs/pk |
| | | 0.0 | 0.22µm | C0000893 | 100pcs/pk |
| To you w | | 90mm | 0.45µm | C0000894 | TOOPCS/pk |
| 5 S 6 S 6 S 6 S 6 S 6 S 6 S 6 S 6 S 6 S | PVDF(Hydrophilic) | 47mm | 0.22µm | C0000909 | 100pcs/pk |
| | | | 0.45µm | C0000563 | Toopes/pk |
| | | 90mm | 0.22µm | C0000910 | 100pcs/pk |
| 150 | | | 0.45µm | C0000911 | Toopes/pk |
| | PVDF(Hydrophobic) | 47mm | 0.22µm | C0000916 | 100pcs/pk |
| | | | 0.45µm | C0000917 | TOOPCS/pk |
| | | 90mm | 0.22µm | C0000918 | 100pcs/pk |
| | | | 0.45µm | C0000919 | TOOPCS/pk |
| (多)。数(2) | PTFE(Hydrophilic) | 47mm | 0.22µm | C0000424 | 100pcs/pk |
| 图 | | | 0.45µm | C0000425 | Toopcs/pk |
| | | 90mm | 0.22µm | C0000899 | 100pcs/pk |
| | | | 0.45µm | C0000900 | Toopes/pk |
| 医观点型态性全国 | PTFE(Hydrophobic) | 47mm | 0.22µm | C0000307 | 100pcs/pk |
| | | | 0.45µm | C0000309 | roopes/pk |
| | | 90mm | 0.22µm | C0000308 | 100pcs/pk |
| | | | 0.45µm | C0000310 | Toopes/pk |

Chemical Compatibility

| C=Compatibility LC=Limited Compatibility | | IC=Incom | patibility | ND=No Data at prese | |
|--|---------------------------|----------|------------|---------------------|-----|
| Che | emical | Nylon | PTFE | PVDF | PES |
| | acetic acid 25% | С | С | С | С |
| | hydrochloric acid 25% | IC | С | С | С |
| | Sulfuric acid,25% | IC | С | С | С |
| ACIDS | Nitric acid,25% | IC | С | С | С |
| | Phosphoric acid,25% | IC | С | ND | ND |
| | Formic acid,25% | IC | С | ND | ND |
| | trichloroacetic acid,10% | IC | С | ND | ND |
| | Methyl alcohol,98% | С | С | С | С |
| | ethyl alcohol,70% | LC | С | С | С |
| | Isopropyl alcohol | С | С | С | С |
| Alcohol | Butanol | С | С | С | С |
| | benzyl alcohol | С | С | С | ND |
| | glycerinum | С | С | С | С |
| | Triethanolamine | С | С | ND | ND |
| Acid | Aniline | ND | С | ND | ND |
| amides | Pyridine | С | С | IC | IC |
| | Acetonitrile | С | С | С | LC |
| | Ethyl acetate | С | С | С | IC |
| | N-butyl acetate | С | С | IC | IC |
| | Propyl acetate | С | С | IC | IC |
| Lipid | Cellosolve acetate | ND | С | ND | IC |
| | Methyl Cellosolve | ND | С | ND | IC |
| | Isopropyl myristate | С | С | ND | IC |
| | Acetone | С | С | IC | IC |
| | Cyclohexanone | С | С | IC | IC |
| Ketone | Methyl ethyl ketone | С | С | LC | IC |
| | Methyl-Isobutyl Ketone | ND | С | LC | IC |
| | Dioxane | С | С | LC | IC |
| Organic | Tetrahydrofuran | С | С | LC | IC |
| Peroxide | Dimethyl sulfoxide | С | С | IC | IC |
| | Isopropyl ether | ND | С | С | С |
| | Phenol solution,10% | ND | С | LC | IC |
| | Formaldehyde Solution,30% | С | С | С | С |
| Sundry | Hydrogen Peroxide | С | С | ND | ND |
| | Silicone oil/silicone oil | ND | С | С | С |

Be Simple, Be Professional

Chromatography Vials, Septa&Caps



Syringe Filter







YOUR RELIABLE SUPPLIER OF CHROMATOGRAPHY VIALS, SEPTA & CAPS SYRINGE FILTERS

